

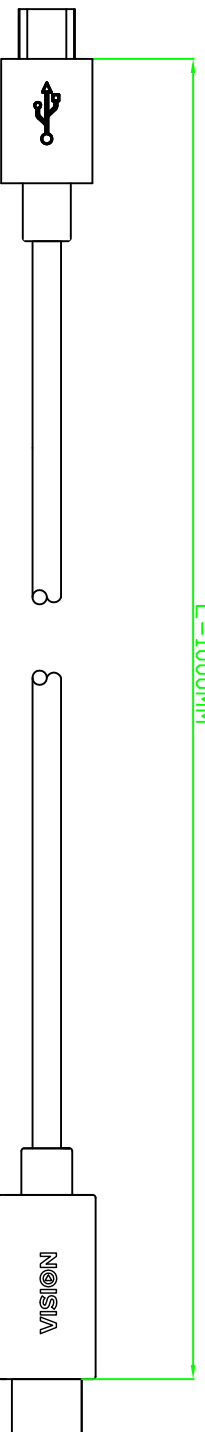



30AWG7/0.10TC\*0.65FMPE\*1P+22AWG41/0.10TC\*1C+3E13/0.10TC+AL+SP64/0.10TC OD3.2


L=1000MM



Single Screen Printing Logo:




Pin assignment:

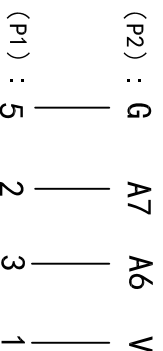

- Notes:
- 100% pass test
  - Data transmission
  - MICRO terminal exposed size 6.0 mm + 0.2mm
  - The outer diameter of the USB C head is 6.65 or 0.1mm
  - No scratches on the surface of the wire, no dirt, no cloaks, no rough edges, etc
  - The product conforms to the RoHS standard.
  - Wire Printing: 80°C 30V VISION

No	Material	Specifications	Unit	Dosage
1	USB 1P+1C+3E+A+SP	30AWG7/0.10TC*0.65FMPE*1P+22AWG41/0.10TC*1C+3E13/0.10TC+AL+SP64/0.10TC OD3.2 A4003 75P白色	M	1.000000
2	TYPE-C 2.0	6-B1139 Stretch pearl nickel terminal gold-plated 'black glue, 2.0 double panel Rd = 5.1 K without capacitance	PCS	1
3	Micro USB	Iron clad nickel, the first 5 and 4 nickel plating, black glue core	PCS	1
4	Internal model	LD PE	kg	0.003000
5	External mold	35P BK pvc	kg	0.015
6	Wire	OD: 0.6MM lead-free	kg	0.00003
7	Tie	BK PVC 10cm	PCS	2

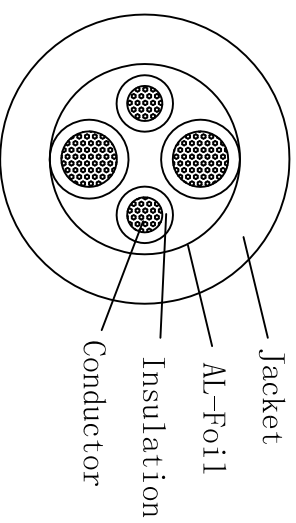

TOLERANCE		SIGNATURE		DATE	DRAFT	CUSTOMER No:	VERSION
L ≤ 1.5m	± 10mm	Drawing: neo	2017.7.28				
1.5m < L ≤ 5m	± 20mm	Checking:					
5m < L ≤ 10m	± 40mm	Approval:					
L > 10m	± 50mm						

USB.2AMA.144

A0