
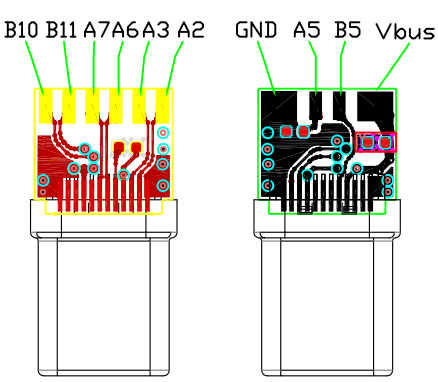
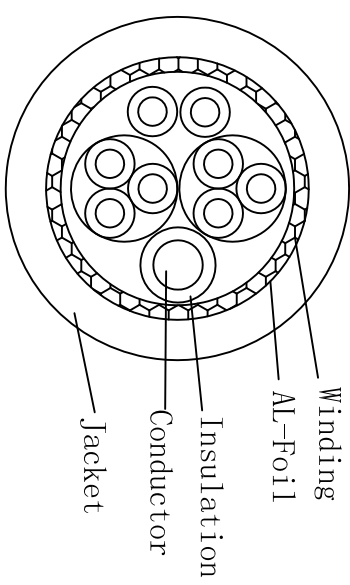


- Notes:
1. 100% pass test
  2. Data transmission
  3. The external dimension of USB A male terminal is  $12 \pm 0.2\text{mm}$
  4. The outer diameter of the USB C head is  $6.65 \pm 0.1\text{mm}$
  5. This product meets the RoHS standard.
  6. Wire Printing: 80 C 30V VISION

Pin assignment:

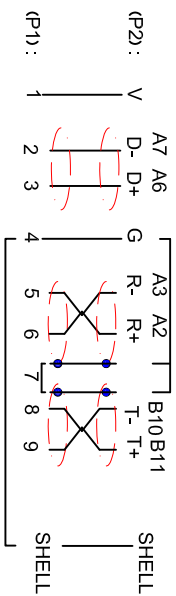

No	Material	Specifications	Unit	Dosage
1	USB 3.0	30AWG (7/0, 10TC*0, 5HDPE)*1P+30AWG (7/0, 10TC*0, 5HDPE)*1P+D7/0, 10TC*0, 5PE+AL)*2P+22AWG (42/1, 0TC)*1C+AL+SP64/0, 10TC OD:4.0 PVC	M	1.02
2	TYPE-C 3.0	6-B112G EB6 CM Tensile pearl nickel 3.0 4 laminar plate RP = 56K C = 10nf	PCS	1
3	USB3.0 AM	iron clad nickel, blue glue core	PCS	1
4	Internal model	LD PE	kg	0.003000
5	External mold	35P White pvc	kg	0.015
6	Wire	OD: 0.6MM Lead-free	kg	0.00003
7	Tie	White PVC 10cm	PCS	2

TOLERANCE		SIGNATURE		DATE
$L \leq 1.5\text{mm}$	$\pm 10\text{mm}$	Drawing:	neo	2017.7.28
$1.5\text{mm} < L \leq 5\text{mm}$	$\pm 20\text{mm}$	Checking:		
$5\text{mm} < L \leq 10\text{mm}$	$\pm 40\text{mm}$	Approval:		
Unit: mm		DRAFT		USB.AT.028
		CUSTOMER No.:		
		VERSION		A0